


UNION F/F

Brand Name: **elson**

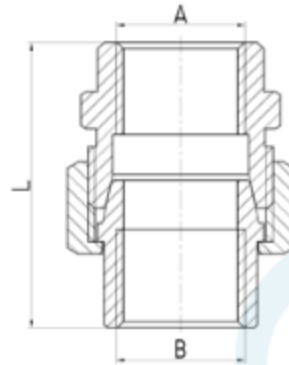

CODE	DESCRIPTION	L(mm)	A	B
81984	UNION F/F 15mm BRASS	46.4	G1/2	G1/2
81986	UNION F/F 15mm CHROME	46.4	G1/2	G1/2
81988	UNION F/F 20mm BRASS	50.5	G3/4	G3/4
81990	UNION F/F 20mm CHROME	50.5	G3/4	G3/4
81992	UNION F/F 25mm BRASS	57	G1	G1
81994	UNION F/F 32mm BRASS	59	G1 1/4	G1 1/4
81996	UNION F/F 40mm BRASS	65	G1 1/2	G1 1/2
81998	UNION F/F 50mm BRASS	76	G2	G2

Product Specification & Features

- Maximum Working Temperature: 95°C
- Maximum Working Pressure at 20°C : Water-2000Kpa, Gas-500KPa
- Threads: Complies with AS ISO 7.1, AS ISO 7.2 and AS 1722.2
- Material: DR Brass, Complies with AS 2345
- Suitable for Potable Water – complies with AS/NZS 4020

Standards & Approvals



WaterMark
WMKA02497
Standard AS 3688
SAI GLOBAL



Australian Standard
Certificate No. SMK 02497
Standard AS 3688

Elson Australasia Pty Ltd

Tel: 02 9625 7899 Fax: 02 9625 7855

Website: www.elson.net.au E-mail: sales@elson.net.au

Version 1.0

Nov. 2020