

**elson METER BALL VALVE RIGHT ANGLE LF DR BRASS
Rp3/4 X 20c COPPER OLIVE LOCKABLE 74135**



Product Code 74135

Technical Specifications

- Maximum Working Temperature: -20-100 °C
- WATER Maximum Allowable Operating Pressure (MAOP) : 2500Kpa
- Threads complies with AS ISO 7.1, AS ISO 7.2 and AS 1722.2
- Arrow indicating flow direction
- Size range: DN20

Features & Benefits

- LEAD FREE DR BRASS
- Pressure tested for the whole assembly
- Lockable handle can be locked opened or closed.
- Standardsmark Certificate Number: SMKP26244 in compliance with 4796
- Watermark Certificate Number: WMKA21922 in compliance with AS5830.1
- Suitable for Potable Water – complies with AS/NZS 4020
- Dezincification Resistant (DR) Brass complies with AS 2345
- WSAA Appraised ball valves



Elson Australasia Pty Ltd


Tel: 02 9625 7899 Fax: 02 9625 7855

Website: www.elson.net.au E-mail: sales@elson.net.au

Version 1.0

Nov. 2020

Product Schematic

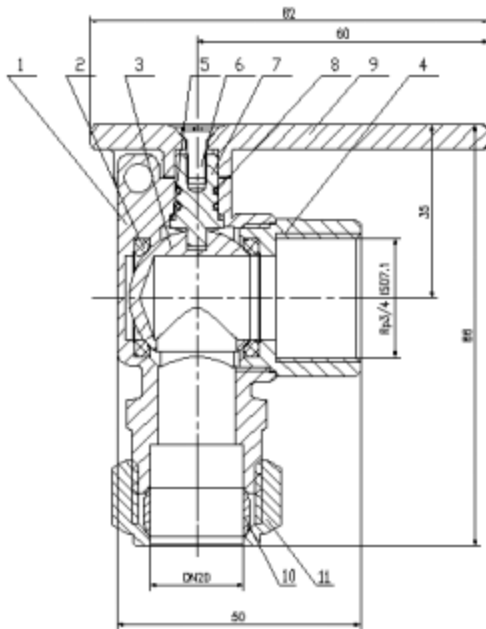

| MATERIALS | | |
|-----------|-------------|---------------------|
| No. | PART NAME | MATERIALS |
| 1 | VALVE BODY | LEAD-FREE DR. BRASS |
| 2 | SEAL | PTFE |
| 3 | BALL | STAINLESS STEEL |
| 4 | END ADAPTER | LEAD-FREE DR. BRASS |
| 5 | WASHER | PTFE |
| 6 | SCREW | STAINLESS STEEL |
| 7 | SPINDLE | LEAD-FREE DR. BRASS |
| 8 | O-RING | EPDM |
| 9 | HANDLE | LEAD-FREE DR. BRASS |
| 10 | OLIVE | COPPER |
| 11 | NUT | LEAD-FREE DR. BRASS |

Product Code 74135

Installation Instructions

1. Installation may be either vertical or horizontal with the direction of the water flow matching the position of the lever handle in the open / on position.
2. The installation must comply within the safe working pressure and temperature requirements. See maximum allowable operating pressure (MAOP) listed above.
3. Once installed the valve must be either in the full "ON" or full "OFF" position.
4. Always check for leaks when installed under pressure in both the full "ON" and full "OFF" position.



Elson Australasia Pty Ltd

Tel: 02 9625 7899 Fax: 02 9625 7855

Website: www.elson.net.au E-mail: sales@elson.net.au

Version 1.0

Nov. 2020