


### **LEAD FREE Plumbing Solutions**



## PRODUCT DATA SHEET

# elson LF PRESSURE LIMITING VALVE 15Cn C/OLIVE LF DR BRASS 500KPa LF76250

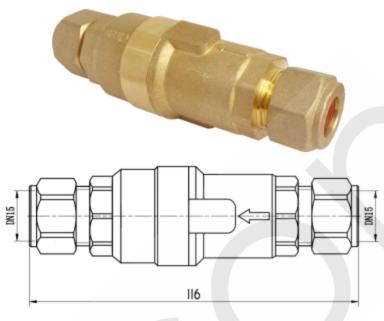

PRODUCT CODE LF76250

## **Technical Specifications**

- Max. Inlet Pressure 2000kPa
- Max. Inlet Temperature(Continuous) 80°C
- Factory set pressure: 500kPa
- . Flow Rate at Pressure 75 L/Min
- Material: DR Brass in compliance with AS 2345
- Threads comply with AS 1722.2.
- · Suitable for potable water, Comply with AS/NZS 4020.
- WaterMark Certificate No. WMK26481, Conforms with AS1357.2.







## Elson Australasia Pty Ltd ABN 45 059 613 991

PO Box 3217, Mt.Druitt Village, NSW 2770

38 Eddie Road, Minchinbury, NSW 2770 | 92 Fox Drive, Dandenong South, VIC 3175

Call 1300 169 026 | Email sales@elson.au







EPS LFPEX | TAPWARE | BUJHPEX | BRASSWARE | LFPRESS | LFVALVE | LFCIVIL

page 1 / 2 V3.0



#### **LEAD FREE Plumbing Solutions**



## PRODUCT DATA SHEET

#### Features & Benefits

- 99.9% LEAD FREE\* DR BRASS
- Suitable for horizontal or vertical installation
- Available in fixed outlet pressure settings of 500kPa
- Manufactured in our ISO9001 certified factory

## Installation Instructions

Pipe work must be flushed prior to installation. This Valve can be installed horizontally or vertically. Ensure the valve is located that allows for easy access. Install in the direction of flow, elson valve flow direction indicated on body. When installed underground, the valve must be installed in a box and must be protected from becoming frozen. Never expose directly to flame or extreme radiant heat as this will affect valve seals and function.

Elson Valves must be fitted by a licensed plumber in accordance with AS3500.1.

## Warranty

2 years

## Application

Pressure Limiting Valves are fitted in water systems to prevent over pressure conditions, are ideal for installation with high pressure storage water heaters, water meter assemblies, water softeners etc.

Pressure Limiting Valves can also be used with domestic appliances such as dishwashers.preset maximum preventing over-pressure situations.

<sup>\*</sup> Elson Lead Free copper alloy products contain less than 0.1% Lead by weight.



Elson Australasia Pty Ltd ABN 45 059 613 991

PO Box 3217, Mt.Druitt Village, NSW 2770

38 Eddie Road, Minchinbury, NSW 2770 | 92 Fox Drive, Dandenong South, VIC 3175

Call 1300 169 026 | Email sales@elson.au







EPS LFPEX | TAPWARE | BUJHPEX | BRASSWARE | LFPRESS | LFVALVE | LFCIVIL

page 2 / 2 V3.0